

GTS67/4-17.5 – Heavy Duty Plant Stepframe Trailer

AU15031223
31.08.17



Overview

The King GTS67 is a low deck height stepframe suited to operators in STGO category 2. The GTS67 comes fully equipped and ready to work, with many standard features other manufacturers provide as extras, all helping keep ahead of the competition.

Main benefits

- Proven design.
- High strength/weight ratio.
- Low deck height.
- 23 tonne neck.
- Designed for sale efficient operation.

Key features

Gooseneck – 258mm deep neck construction with chamfered approach and 44mm hardwood floor with covered stowage area above Kingpin. 5 pairs of 2.25 tonne load shackles. 2240mm rear swing clearance. Two speed landing legs. Rope hooks fitted as standard.

Load platform – High tensile I beam main deck construction with nominal 520mm I beam cross member spacing. 2.55m wide. Rear beavertail with drop down

steady legs. Fitted with 44mm hardwood floor including timber over the wheels. 8 pairs slide out outriggers (to accept 70mm timbers – not supplied) to main deck, 2 pairs to beavertail. 7 pairs of 5 tonne load shackles. Laden height 926mm nominal. Rope hooks fitted as standard.

Ramps – 2.5m x 1m wide single piece hydraulic ramps. Electric power pack is standard. Loading angle 12.5°.

Axles/suspension – 4 x 11 tonne axles with air suspension and raise/lower facility. Rearmost 2 axles being self-steer complete with manual and automatic wired to reversing light circuit.

Wheels/tyres – 235/75R 17.5 low profile tyres on 10 stud rims – 16 off.




Brakes/electrics – EC compliant 2 line braking with EBS. 24v ISO with 2 x 7 pin sockets and 1 x 15 pin socket. Beacon and DIN socket as standard. Electronic roll stability fitted as standard.

Finish – All steel parts shot blasted to SA2.5 followed by high build primer and two pack single colour top coat of customer's choice.


Options – A full range of options are available, including 2.5m and 1.5m x 1.0m wide and double fold 'Mantis' ramps (as shown).

Plating Data	Design	56mph (90kph)	40mph (64kph)	25mph (40kph)
Gross trailer weight	67,000kg	44,000kg	67,000kg	67,000kg
Axle capacity	11,000kg	6,000kg	11,000kg	11,000kg
Kingpin loading	23,000kg	23,000kg	23,000kg	23,000kg
Approx. tare weight*	12,500kg	12,500kg	12,500kg	12,500kg
Payload (approx.)	N/A	31,500kg	54,500kg	54,500kg

*Tare weight and payload vary depending on options supplied.
* Kingpin loading dependent on tractor unit weight.

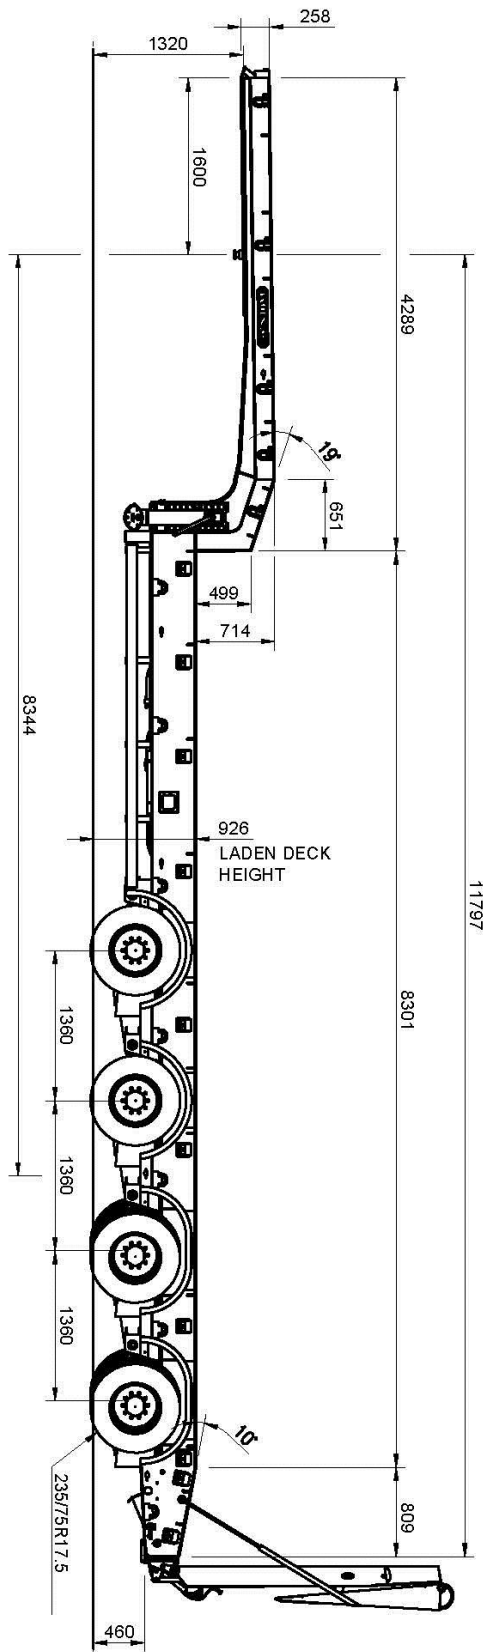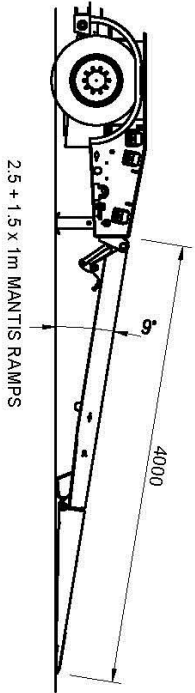

OPTIONAL MANTIS
RAMPS SHOWN

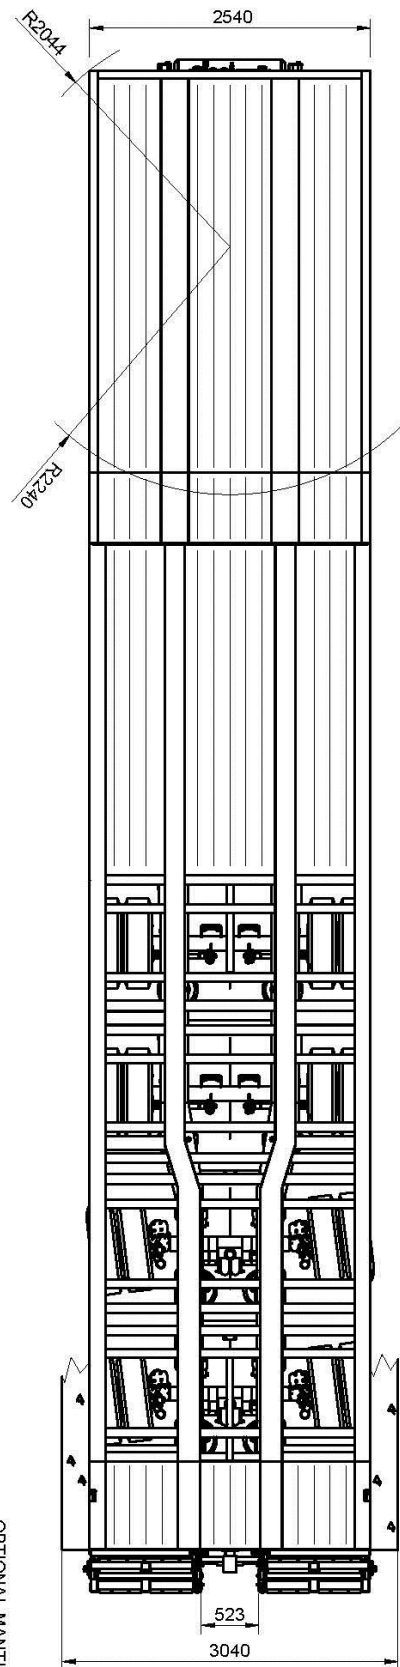

AUT0901223
GTS67/4
28/03/17
REV. A



Group of Companies

Company Number: 3503886 • VAT Reg No: GB 352 8385 37



Q05083